

DECARBURIZING HEATING AND/OR CARBURIZING DESULFURIZING TREATMENT METAL SLAG SRF FIG. 1B

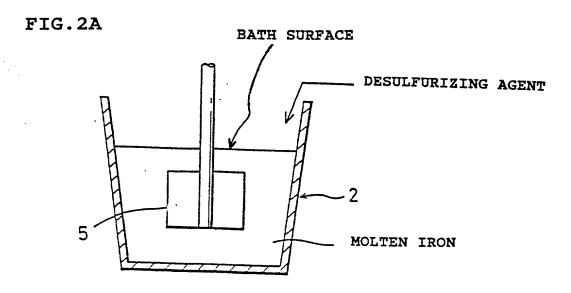




FIG.2B

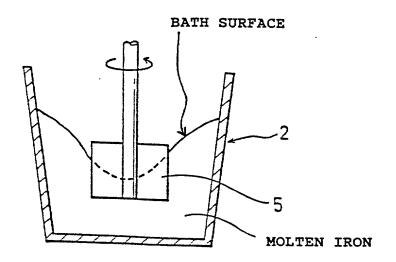


FIG.3

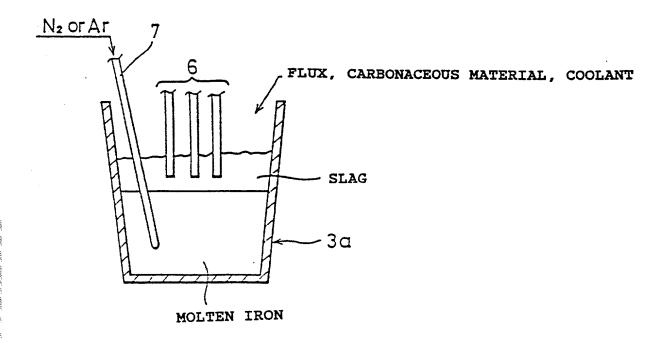
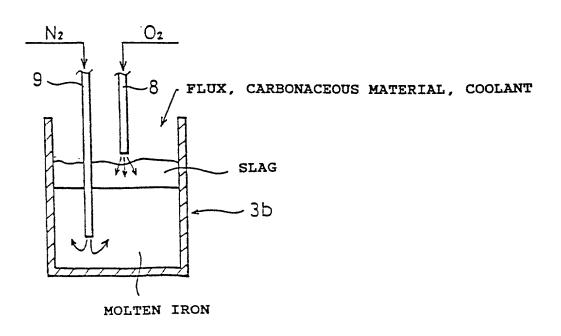


FIG.4





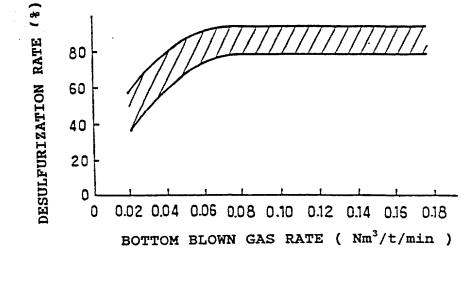


FIG.6

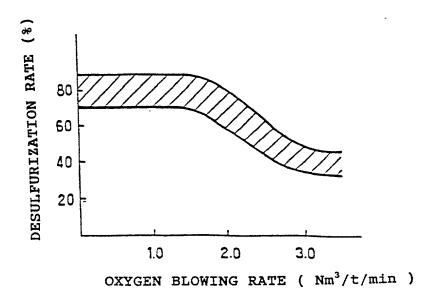

TO BE A SECOND TO THE PARTY OF THE PARTY OF

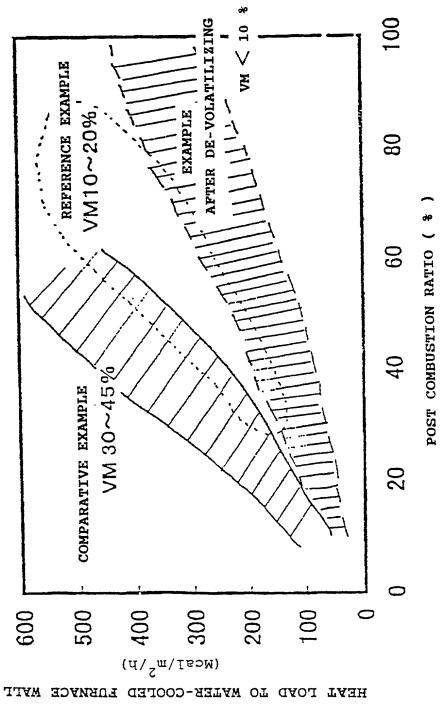

HEAT LOAD TO WATER-COOLED FURNACE WALL

FIG.8

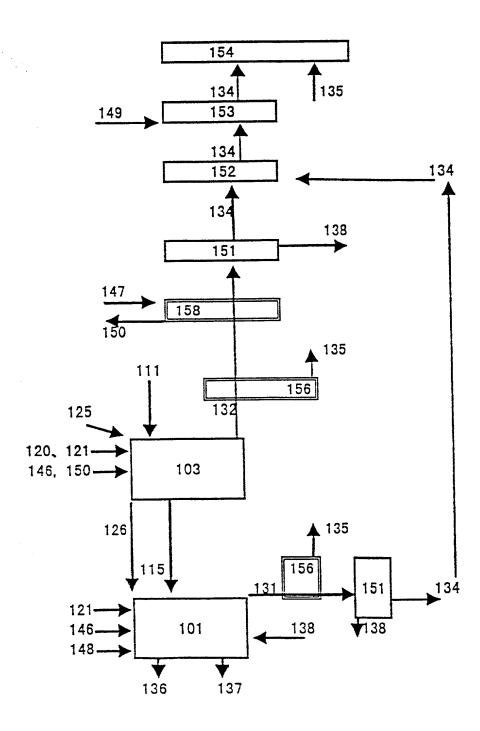
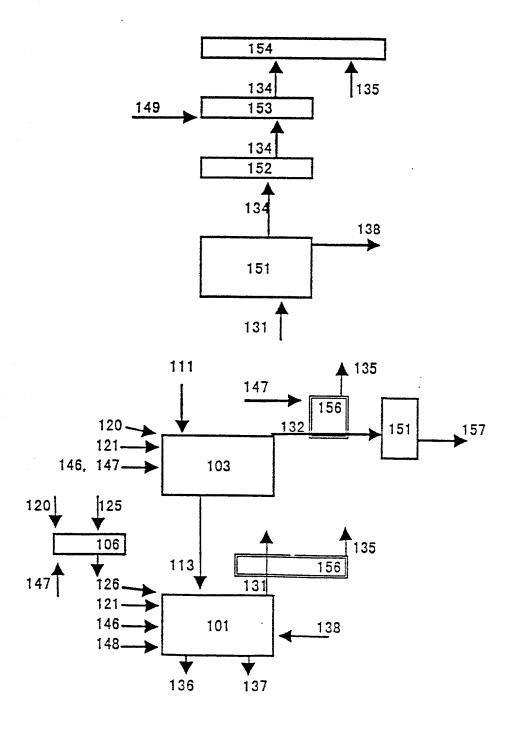


FIG.9



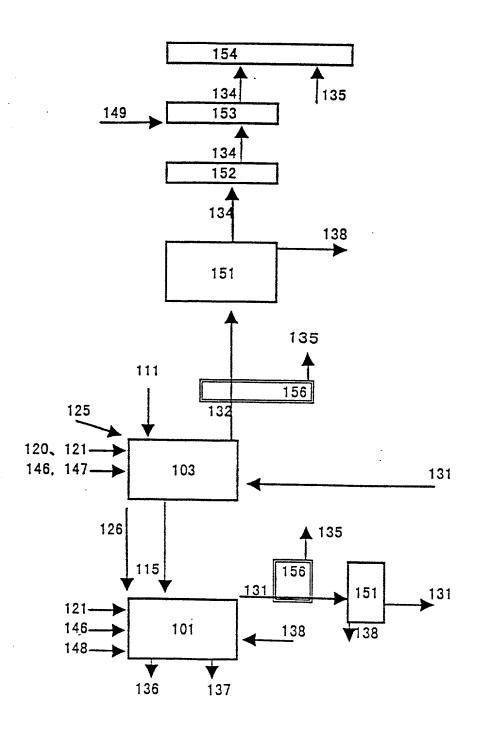


FIG.11

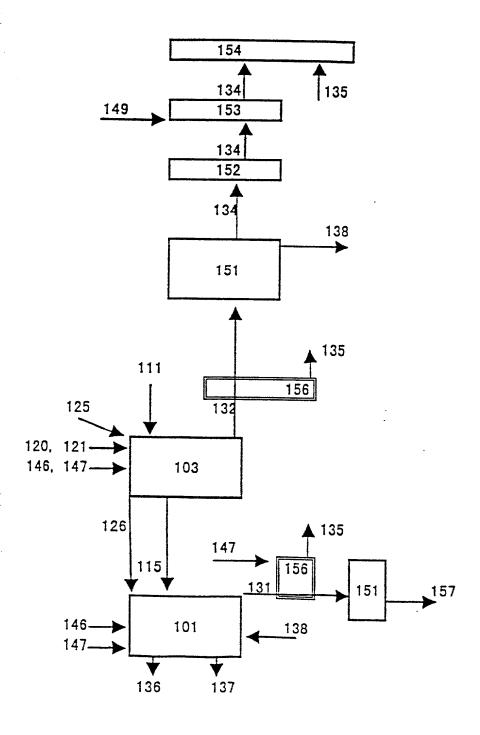


FIG.12

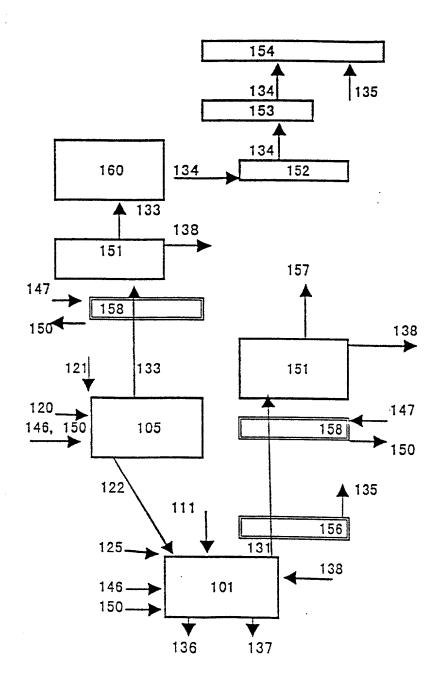


FIG. 13

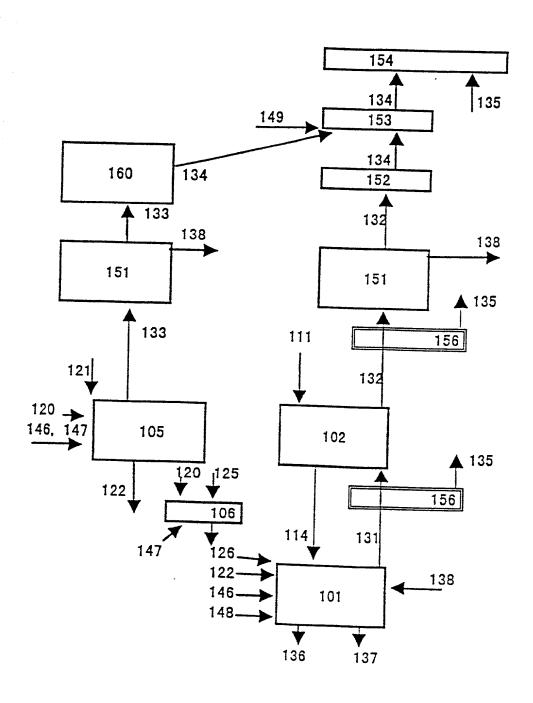


FIG.14




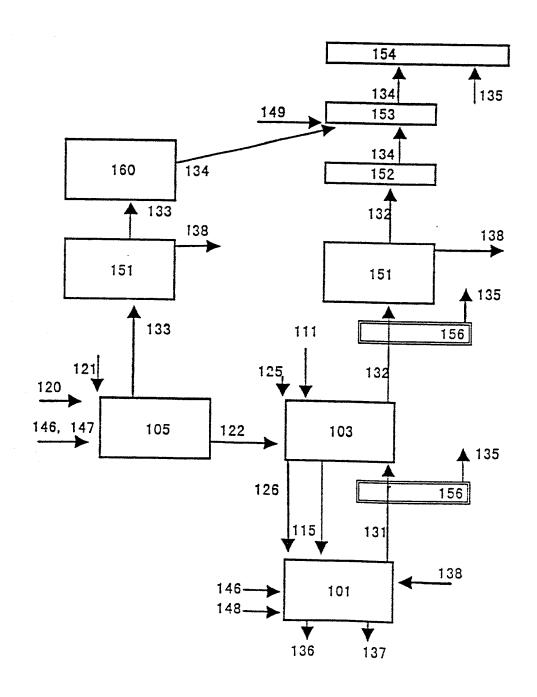


FIG.15

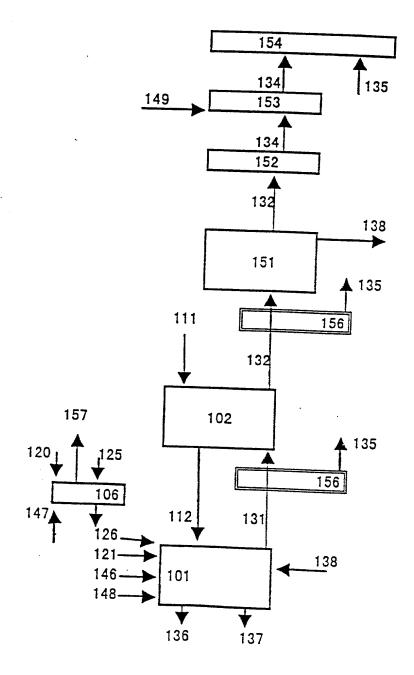

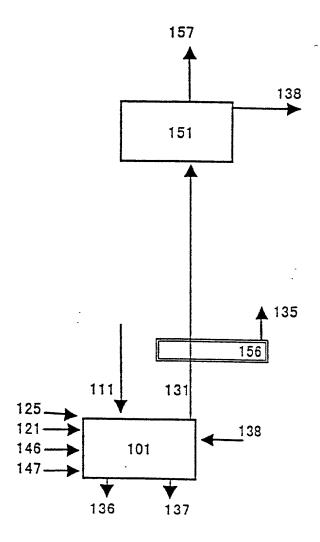

The first that the first to the first that the firs

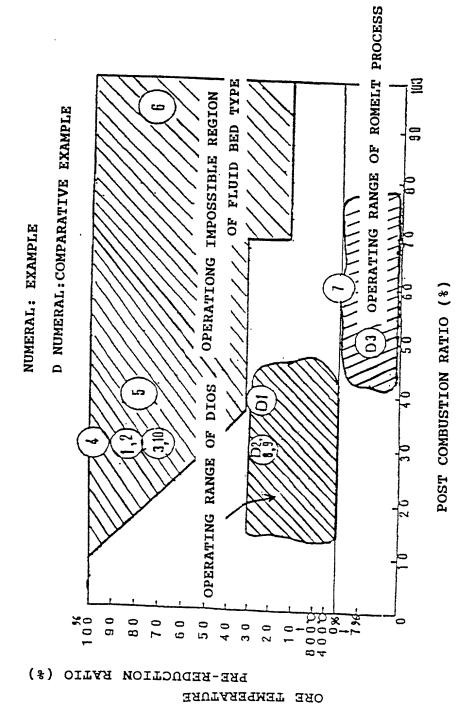

WATER CONTENT OF ORE

FIG.18

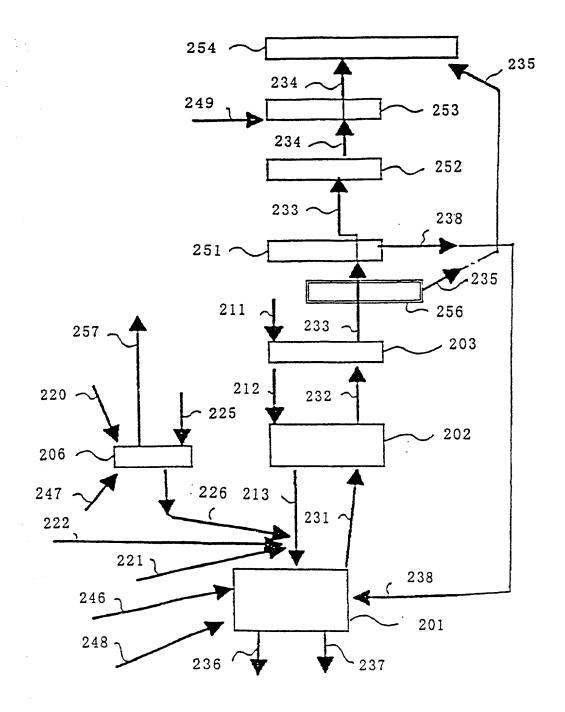


FIG.19

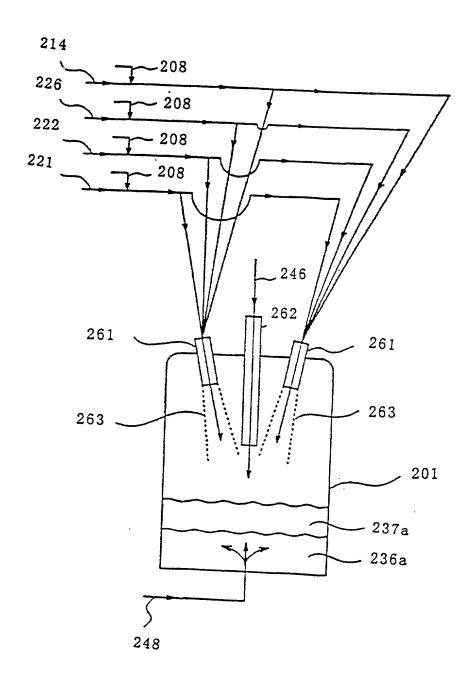


FIG.20

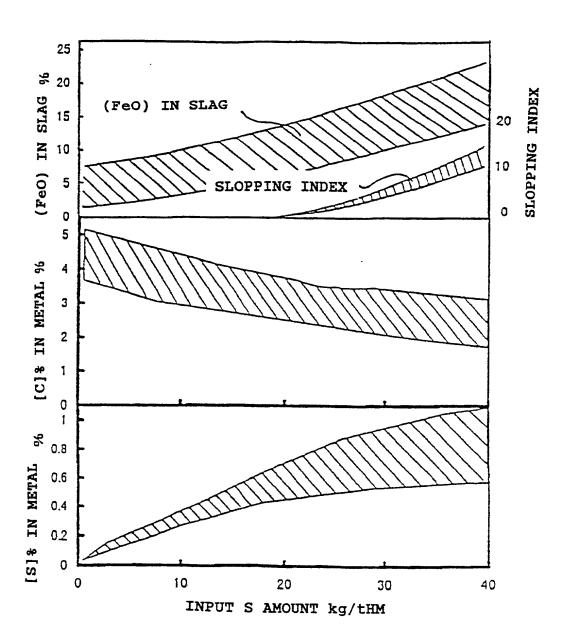


FIG. 21

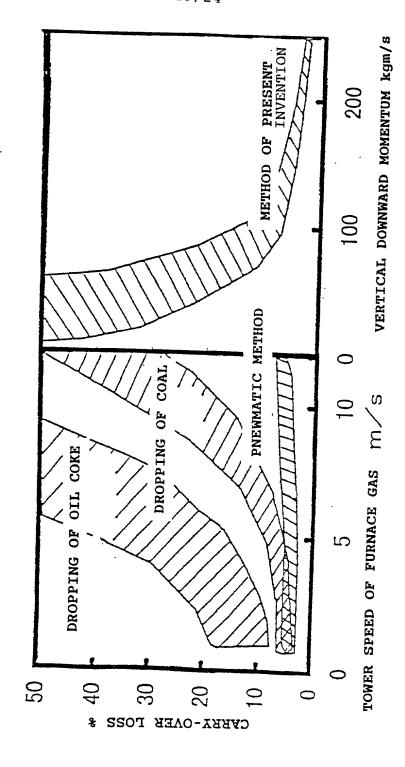
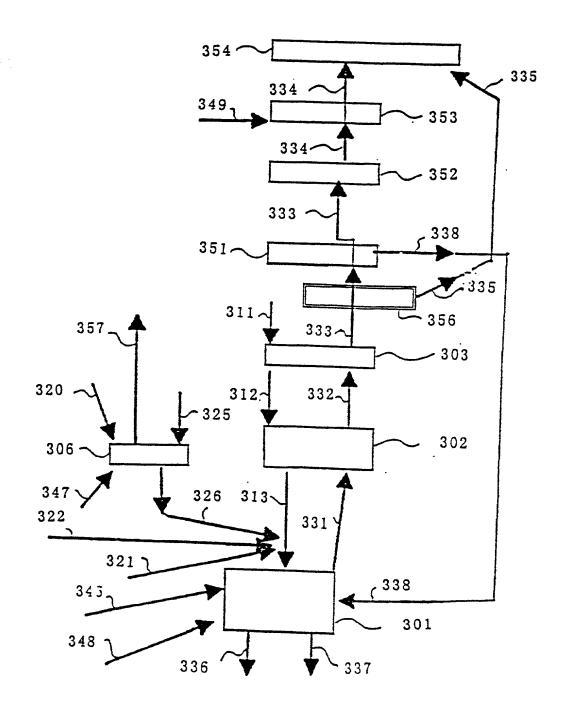
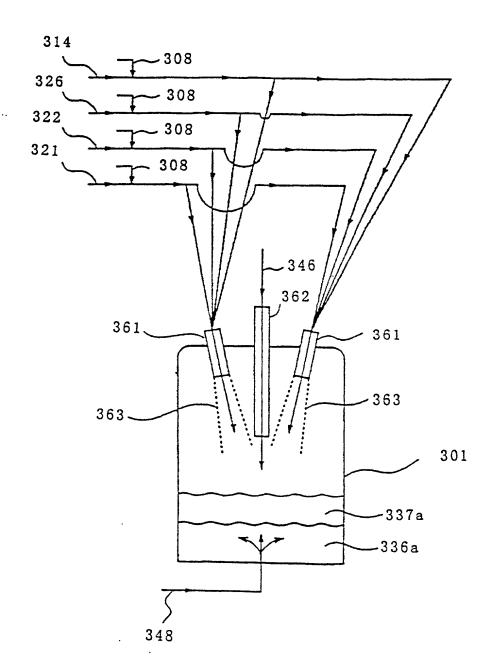


FIG. 22







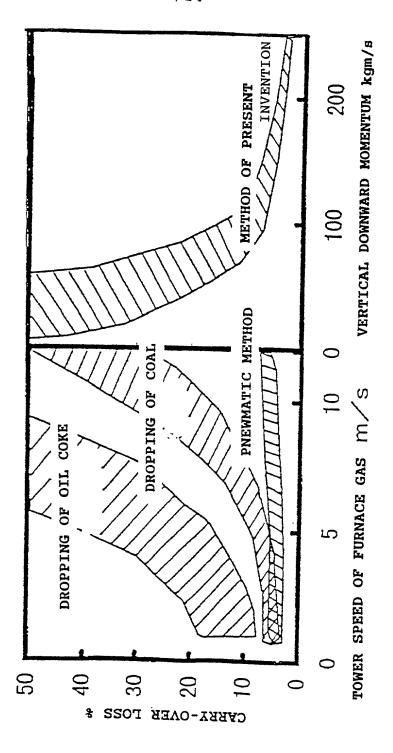


FIG.25

